

RINGSPANN®

Disc Couplings



Disc Couplings


Nominal torques
up to 18 700 Nm

torsionally rigid,
backlash free

Maintenance free

Enlarged hubs
available

Manganese phosphated
as standard

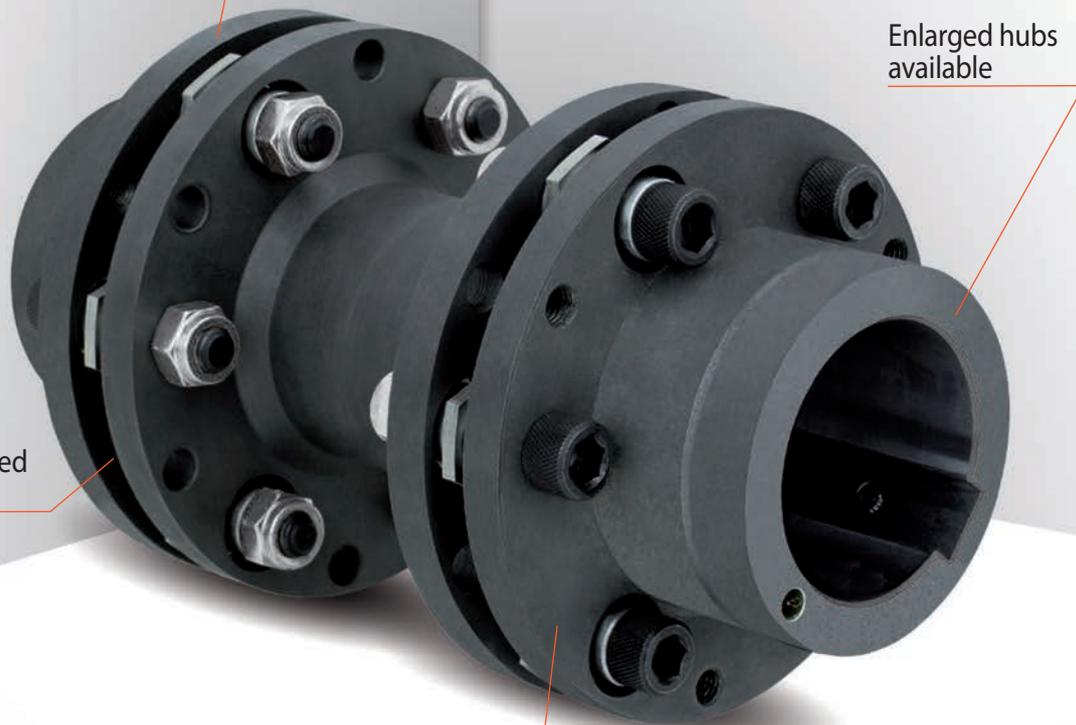

Smooth run because dynamically balanced
according to DIN ISO 1940 quality 6.3

Your benefit

- >> Corrosion protection
- >> Balancing quality up to DIN ISO G2.5 possible
- >> Maximum speed up to 25 500 min⁻¹
- >> High torque capacity
- >> Compensation of axial, radial and angular misalignments
- >> Temperature range -20 °C to +280 °C
- >> Design according to API610 and API671 possible